


Battery acid resistant Resistance Thermometer

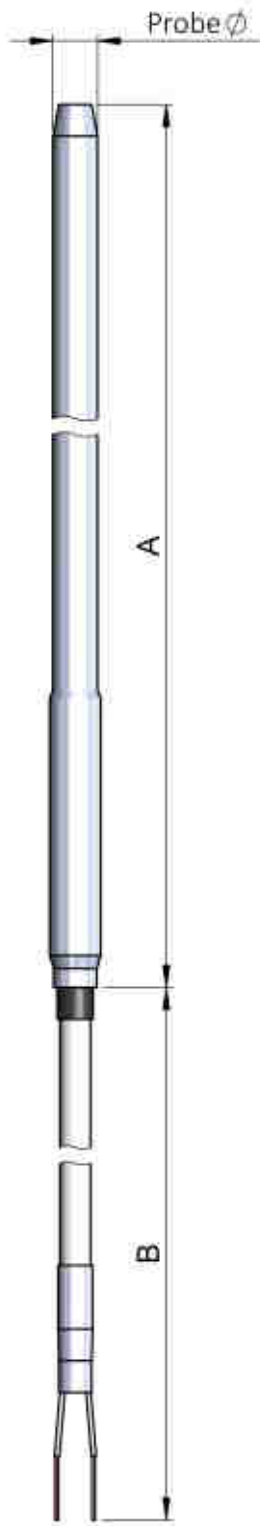

Sensor: according to DIN EN 60751 Pt100 Pt1000
 others _____

Tolerance: class B class 1/3 B
 class 1/10 B class A

Circuit: 2-wire 3-wire
 4-wire

Probe Diameter: 7.5 mm
 others _____

Protective Tube: stainless steel (mat.-no.: 1.4571)
 others _____

Probe Length "A": please specify _____ mm,
 total probe length with PVC-sheath acid proof
 shrunk

Lead Wire: flexible lead wire insulated with
 silicone (-50 °C - 180 °C)
 fiberglass (400 °C, for a short time to 500 °C)
 PVC (-25 °C - 105 °C, for a short time to 125 °C)
 others _____

Further possibilities and information on our cable and
 wire range can be found on page 122.

Wire Length "B": please specify _____ mm

Termination: plug jack
 Lemo: please specify size _____
 Tuchel: please specify size _____
 Binder: please specify size _____
 Fischer: please specify size _____
 bare ends
 others _____

Further information on our connector range can be found on page 94.

Quantity: _____ piece(s)