


# Waterproof Resistance Thermometer

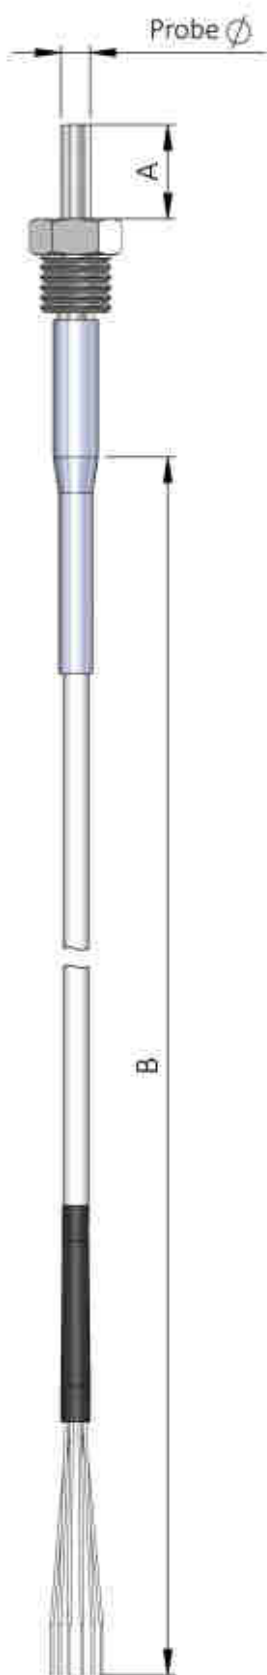

**Sensor:** according to DIN EN 60751  Pt100  Pt1000  
 others \_\_\_\_\_

**Tolerance:**  class B  class 1/3 B  
 class 1/10 B  class A

**Circuit:**  2-wire  3-wire  
 4-wire

**Probe Diameter:**  4.0 mm  
 others \_\_\_\_\_

**Probe Length "A":** please specify \_\_\_\_\_ mm

**Process Connection:**  tip; Ø, length: 4.0 x 36.0 mm, thread: R1/8"  
 others \_\_\_\_\_

**Lead Wire:** flexible thermocouple cable insulated with  
 silicone (-50 °C - 180 °C)  
 fiberglass (400 °C, for a short time to 500 °C)  
 PVC (-25 °C - 105 °C, for a short time to 125 °C)  
 others \_\_\_\_\_

Further possibilities and information on our cable and wire range can be found on page 122.

**Wire Length "B":** please specify \_\_\_\_\_ mm

**Termination:**  plug  jack  
 Lemo: please specify size \_\_\_\_\_  
 Tuchel: please specify size \_\_\_\_\_  
 Binder: please specify size \_\_\_\_\_  
 Fischer: please specify size \_\_\_\_\_  
 others \_\_\_\_\_

Further information on our connector range can be found on page 94.

**Quantity:** \_\_\_\_\_ piece(s)